

**(19) World Intellectual Property  
Organization  
International Bureau**



**(43) International Publication Date**  
**2 December 2004 (02.12.2004)**

## PCT

**(10) International Publication Number**  
**WO 2004/105070 A3**

(51) International Patent Classification<sup>7</sup>: H01J 1/62,  
63/04, C09K 11/64

(74) Agent: CASTEL, Benoît; c/o Young & Thompson, 745 South 23rd Street, Arlington, VA 22202 (US).

**(21) International Application Number:**  
PCT/US2004/015079

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**(22) International Filing Date:** 13 May 2004 (13.05.2004)

(25) Filing Language: English

(26) Publication Language: English

<b>(30) Priority Data:</b>		
60/470,635	15 May 2003 (15.05.2003)	US
60/470,734	15 May 2003 (15.05.2003)	US

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) **Applicant** (for all designated States except US): **OSRAM SYLVANIA INC.** [US/US]; 100 Endicott Street, Danvers, MA 01923 (US).

**(72) Inventors; and**

**Published:**


(75) **Inventors/Applicants (for US only):** **MARKING, Gregory** [US/US]; 210 So. Pennsylvania Avenue, Sayre, PA 18840 (US). **CHAU, Chung-Nin** [US/US]; 111 Walnut Street, Apt. #3, Athens, PA 18810 (US). **SNYDER, Thomas** [US/US]; R.R. Box 1472, Laceyville, PA 18623 (US). **NORTHROP, Shellie, K.** [US/US]; Larch Road, Apt. 4, Sayre, PA 18840 (US). **FAN, Chen-Wen** [US/US]; 214 Sharon Avenue, Sayre, PA 18840 (US).

— with international search report

(88) Date of publication of the international search report: 23 June 2005

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: VUV-EXCITED DEVICE WITH BLUE-EMITTING PHOSPHOR

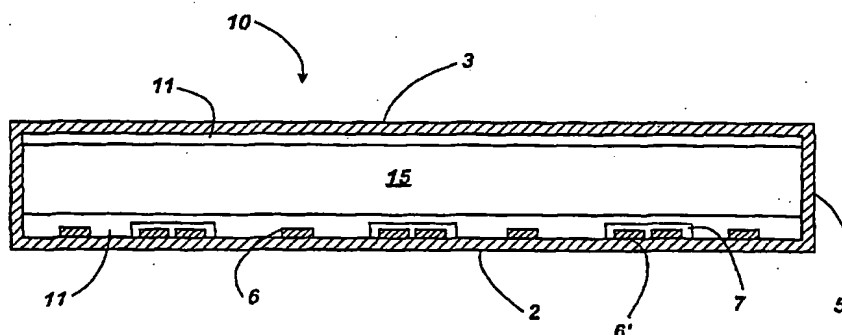

**(57) Abstract:** Blue-emitting phosphors for use with plasma display panels (PDP) or other vacuum ultraviolet-excited (VUV) devices are provided. These blue-emitting phosphors and mixtures thereof include at least a europium-activated calcium-substituted barium hexa-aluminate (CBAL) phosphor. Preferably, the CBAL phosphor has a composition which may be represented by the formula:  $\text{Ba}_{1.29-x-y}\text{Ca}_x\text{Eu}_y\text{Al}_{12}\text{O}_{19.29}$ , wherein  $0 < x < 0.25$  and  $0.01 < y < 0.20$ .

These blue-emitting phosphors exhibit improved degradation characteristics, including reduced color shift and increased intensity maintenance, under conditions found in VUV-excited devices.

**WO 2004/105070 A3**

## VUV-excited Device with Blue-emitting Phosphor

### Cross References to Related Applications

This application claims the benefit of U.S. Provisional Application Nos. 60/470,734  
5 and 60/470,635, both filed May 15, 2003.

### Technical Field

This invention relates to blue-emitting phosphors and mixtures thereof for use in  
plasma display devices or other vacuum ultraviolet (VUV) excited devices. These  
10 devices include, in part, such apparatus as a plasma display panel or vacuum ultraviolet  
excited lamp which consist in part of a sealed transparent structure filled with a rare gas  
or a mixture of such rare gases and also containing red-, green-, or blue-emitting  
phosphors. A high voltage electrical current produces a gas discharge which emits  
vacuum ultraviolet radiation as a primary source of excitation. The VUV radiation then  
15 excites the phosphors to emit visible light.

### Background of the Invention

Conventional plasma display devices are filled with rare gases (e.g., helium, neon,  
argon, xenon, and krypton) or mixtures of rare gases, which are excited by a high  
20 voltage electrical current to emit ultraviolet radiation in the VUV range below 200 nm  
in wavelength. This emitted VUV radiation is then used a primary source of excitation  
to excite various blue, green, and red emitting phosphors. The plasma display panels  
(PDP) are made with a back carrier plate, a transparent front plate, and a ribbed  
structure, which divides the space between the front and back plates into cells. The  
25 plasma display panels also contain a sophisticated electrode array, which can address  
and excite each discrete plasma cell individually. Each cell contains a small amount of  
the rare gas mixture and a small quantity of phosphor, which emits only one of the  
three colors. Cells containing phosphors which emit with each of the three distinct  
colors, red, green, and blue, are statistically distributed on the back plate within the  
30 panel in much the same fashion as the different colored pixels are distributed in other  
types of display panels, such as CRT displays. Like plasma display panels, VUV-

excited lamps also contain rare gases or mixtures of rare gases and si  
The excitation-emission principles are similar to display panels exce  
blue, green, and red phosphors are broadly coated on the inside of a lamp and emit with  
an intent to generate an overall white color instead of the three separate colors which  
5 are emitted by the various discrete plasma cells.

The most commonly used VUV excitation energy comes from xenon or xenon-helium  
plasmas, which emit in the region 147 nm to 173 nm. The exact emission spectra  
depends on the Xe concentration and overall gas composition. Under high voltage  
10 excitation, Xe-based plasmas typically have a Xe emission line at 147 nm and a Xe  
excimer band emission around 173 nm. This is very different from the primary 254 nm  
excitation radiation produced by the low-pressure, mercury vapor discharge of  
conventional fluorescent lamps. As a result, phosphors used in VUV-excited  
applications have new requirements imposed on them by the higher excitation energies  
15 as compared to conventional short-wave ultraviolet fluorescent applications.

In general, the phosphors used in VUV-excited devices exhibit some undesirable  
properties. However, the most problematic is the phosphor commonly used as the blue  
emitter, europium-activated barium magnesium aluminate (BAM),  $\text{Ba}_{1-x}\text{Eu}_x\text{MgAl}_{10}\text{O}_{17}$   
20  $(0.01 < x < 0.20)$ . This phosphor is known to degrade in both brightness and color  
during the manufacturing process due to elevated temperatures and humidity. During  
manufacture of PDP panels, a thin MgO layer is applied for the purpose of protecting  
the transparent front plate and dielectric layer. MgO is quite hygroscopic and the high  
humidity conditions found during manufacture of the panels arise from water that is  
25 dissociated from the MgO layer during bakeout. This water is believed to be  
instrumental in the degradation in color causing a shift in the color point towards the  
green region. This phosphor also degrades in both brightness and color after extended  
exposure to the high intensity Xe plasma and VUV photon flux. The degradation  
mechanisms of BAM are the subject of much study and are thought to involve such  
30 changes as oxidation of  $\text{Eu}^{2+}$  to  $\text{Eu}^{3+}$ , modifications in the actual structure of the  
aluminate phosphor lattice, and movement of the  $\text{Eu}^{2+}$  activator ions between different

sites within the lattice. The actual life of a commercial plasma dramatically shortened due to the shift in the color point and reduction of the blue phosphor component, which leads to an undesirable yellow shift in the overall panel color. One highly relevant measure of this degradation is the ratio of the intensity (I) to the CIE y color point which can be calculated as a percentage. Both the intensity decrease and the increase in CIE y color coordinate (green shift) result in a reduction of the I/y ratio.

In recent years, a number of different approaches have been attempted in order to improve the maintenance of blue-emitting VUV-excited BAM phosphors. These approaches include sol-gel coating of wide bandgap metal oxides onto BAM phosphor, U.S. Patent Publication No. 2002/0039665; thermal treatments of aluminate phosphors mixed with ammonium fluorides, U.S. Patent No. 6,242,043; and solution based catena-polyphosphate coatings of BAM phosphor, U.S. Patent No. 5,998,047. Substitutional variations of the BAM stoichiometry have also been attempted in order to improve the maintenance of BAM such as substitution of alkali metals, alkaline earth metals, or zinc for one or more of the metallic components in BAM, U.S. Patent Publication No. 2002/0190240 A1. To date, none of these approaches have been entirely successful.

In addition, new phosphor compositions have been investigated which exhibit improved maintenance relative to commercial BAM phosphors such as  $(\text{La}_{1-x-y-z}\text{M}_x\text{Li}_y\text{Sr}_z)\text{PO}_4$ , U.S. Patent No. 5,989,454;  $\text{Ba}_{1-a}\text{Eu}_a\text{MgAl}_6\text{O}_{11}$ , U.S. Patent No. 6,527,978;  $\text{CaMgSi}_2\text{O}_6:\text{Eu}^{2+}$ ; and  $\text{CaAl}_2\text{O}_4:\text{Eu}^{2+}$ . A solid solution phase of BAM-barium hexa-aluminate ( $0.82\text{BaO} \cdot 6\text{Al}_2\text{O}_3$ ) exhibits improved color stability and maintenance but has an undesirable color point. New mixtures or blends of blue VUV phosphors have also been disclosed with improved maintenance characteristics such as  $(\text{La}_{1-x-y-z}\text{M}_x\text{Li}_y\text{AE}_z)\text{PO}_4$  mixed with BAM,  $\text{Eu}^{2+}$ -activated barium magnesium lanthanum aluminate,  $\text{Eu}^{2+}$ -activated alkaline earth chloroapatite, or  $\text{Eu}^{2+}$ -activated calcium chloroborate phosphors, U.S. Patent No. 6,187,225; and BAM or SCAP

(Ba,Sr,Ca)<sub>5</sub>(PO<sub>4</sub>)<sub>3</sub>Cl:Eu mixed with a wide number of UV-C light em  
U.S. Patent Publication No. 2001/0033133 A1.

Although many of these phosphors or phosphor complexes exhibit improvements in  
5 color and intensity stability, none have yet proven to be viable alternatives. Thus, there  
is still a need for improved blue-emitting VUV-excited phosphors. In particular, the  
following properties would be desirable: a deeper blue color, improved color stability  
during panel manufacture, improved lifetime during panel operation, and a high relative  
percent maintenance of the I/y ratio after accelerated thermal, humidity, Xe plasma, and  
10 high intensity VUV photon flux testing.

#### Summary of the Invention

It has been discovered that an europium-activated, calcium-substituted barium hexa-  
aluminate (CBAL) phosphor can be used in VUV-excited devices as an acceptable  
15 blue-emitting phosphor without suffering the degradation exhibited by BAM  
phosphors. CBAL phosphors have been previously described as a conventional  
fluorescent phosphor in U.S. Patent No. 4,827,187, for use with mercury vapor  
discharges, but have not heretofore been described for use in VUV-excited devices.  
Preferably, the CBAL phosphor has a composition represented by the formula Ba<sub>1.29-x-</sub>  
20 <sub>y</sub>Ca<sub>x</sub>Eu<sub>y</sub>Al<sub>12</sub>O<sub>19.29</sub>, wherein 0 < x < 0.25 and 0.01 < y < 0.20.

Under VUV excitation, CBAL phosphors exhibit a deeper blue emission peak than  
BAM phosphors, but with only 80 – 85% the initial intensity of a commercially  
available BAM phosphor. However, upon exposure to elevated temperature and  
25 humidity conditions, CBAL phosphors exhibit very nearly zero green shift in the color  
point and very little loss of intensity. Furthermore, upon exposure to a high intensity  
VUV photon flux used as an accelerated aging test, the CBAL phosphor exhibits less  
than ½ the intensity degradation found in a commercial BAM phosphor and very nearly  
no color shift. CBAL phosphors may be also coated with an aluminum oxyhydroxide  
30 coating resulting in additional improvements to its maintenance when exposed to the  
high intensity VUV photon flux. These coated phosphors will be hereinafter referred to

by the acronym cCBAL. The CBAL phosphors may also be used in c  
other blue-emitting phosphors. In particular, CBAL and cCBAL ph  
blended with a BAM phosphor, a BAM phosphor having an aluminum oxyhydroxide  
coating (cBAM), or thulium- and lithium-activated gadolinium lanthanum phosphate  
5 (LaPOT), (Gd,La)PO<sub>4</sub>:Tm,Li, a near-UV-, blue-, and IR- emitting phosphor which is  
described in U.S. Patent Nos. 6,187,225, 5,989,454, and 6,419,852.

#### Brief Description of the Drawing

The Figure is a cross-sectional illustration of a VUV-excited device.

10

#### Detailed Description of the Invention

For a better understanding of the present invention, together with other and further  
objects, advantages and capabilities thereof, reference is made to the following  
disclosure and appended claims taken in conjunction with the above-described drawing.

15

The Figure illustrates a type of VUV-excited device which is generally referred to as a  
dielectric barrier discharge lamp. The flat rectangular-shaped device is shown in cross  
section. The discharge vessel 10 is constructed of a transparent material such as glass  
and comprises a front plate 3 and a back plate 2 which are joined by frame 5 at the  
20 periphery of the plates. The discharge vessel 10 encloses discharge chamber 15 which  
contains a rare gas, typically xenon, or mixture of rare gases, and is used to generate a  
discharge which emits vacuum ultraviolet (VUV) radiation. The back plate 2 has  
multiple strip electrodes 6 which may serve as anodes and cathodes during operation.  
At least some of the electrodes 6' are covered with a dielectric barrier layer 7. The  
25 inner surface of the top plate 3 and back plate 2 are coated with a phosphor layer 11 for  
converting at least some of the VUV radiation into visible light. Further examples of  
dielectric barrier discharge lamps are described in U.S. Patent Nos. 6,566,810,  
6,246,171 and 6,469,435. Examples of plasma display panels are described in U.S.  
Patent Nos. 6,713,959 and 6,726,519.

30

Laboratory tests have been designed to simulate actual PDP panel m  
use, including a thermal humidity test and an accelerated aging test. I  
and after the thermal humidity and accelerated aging tests were obtained by measuring  
emission spectra using a Perkin-Elmer LS-50B spectrometer and quantifying them  
5 relative to the emission spectrum of a standard BAM phosphor reference. The peak  
wavelengths at maximum intensity were derived from the spectra and the y coordinate  
color values were calculated from the spectral data using well-known and accepted  
equations based on X, Y, Z – tristimulus curves. The excitation source is a  
commercially available xenon excimer lamp (XeCM-L from Resonance, Ltd., Barrie,  
10 Ontario, Canada) used to illuminate powder plaques while excluding air from the VUV  
beam path. The phosphor can also be mixed into a paste, coated onto alumina chips or  
“slides” and dried, and measured in this fashion.

The thermal humidity test involves exposing the phosphor samples to a warm, water-  
15 saturated air flow at 425 °C for 2 hours. The accelerated aging test involves exposure  
to a high intensity Xe plasma and VUV photon flux. The accelerated aging test is  
performed in a high-power, rare-gas discharge chamber. The chamber consists of a 100  
cm loop of 5 cm I.D. Pyrex™ tubing that has approximately 5 millitorr of flowing Xe  
after it is initially evacuated to a  $10^{-6}$  torr vacuum. An inductively coupled discharge is  
20 obtained by applying approximately 280 watts of input power at 450 kHz from an RF  
power supply. It is estimated that there is approximately 90 milliwatts/cm<sup>2</sup> of 147 nm  
VUV radiation at the sample surface. No significant excimer emission is generated  
under these conditions. After a selected amount of exposure time, the phosphor  
samples were measured for brightness as described above. Limited results for PDP  
25 panels indicate that such accelerated tests do indeed simulate actual PDP panel  
manufacturing and usage conditions. The results of these tests may also be used to  
predict phosphor performance in other types of VUV-excited devices such as dielectric  
barrier discharge lamps.

### 30 Examples

CBAL phosphors can be made by thoroughly blending aluminum hydroxide carbonate, calcium carbonate, europium oxide, and barium fluoride carbonate, then firing the resulting mixture in alumina or alumina-based trays for between 2 and 4 hours at 1400°C to 1600°C in a reducing furnace under a nitrogen-hydrogen atmosphere (ranging from 5% hydrogen to 75% hydrogen with the remainder being nitrogen gas). The fired cakes are then washed in de-ionized water and wet sieved through a 378 mesh screen or alternatively lightly milled before wet sieving. The material is then dried and dry screened through a 60 mesh sieve to break up any possible agglomerates. Three non-limiting examples of CBAL formulations are listed below. Formulation #1 was used to prepare the samples for accelerated testing. Formulation variations can be used to prepare similar phosphors with similar properties.

## CBAL Formulation #1

15	Reagent	molar ratio	wt. Ratio (adjusted by assay)
	Al(OH) <sub>3</sub>	11.0000	6.9076
	CaCO <sub>3</sub>	0.1700	0.1366
	BaF <sub>2</sub>	0.1000	0.1407
	Eu <sub>2</sub> O <sub>3</sub>	0.0400	0.1153
20	BaCO <sub>3</sub>	0.8325	1.3251

## CBAL Formulation #2

	Reagent	molar ratio	wt. Ratio (adjusted by assay)
	Al(OH) <sub>3</sub>	11.0000	3.3458
25	CaCO <sub>3</sub>	0.1500	0.0602
	BaF <sub>2</sub>	0.1000	0.0704
	Eu <sub>2</sub> O <sub>3</sub>	0.0400	0.0576
	BaCO <sub>3</sub>	0.8525	0.6785



## CBAL Formulation #3

	Reagent	molar ratio	wt. Ratio (adjusted by ass:
	Al(OH) <sub>3</sub>	11.0000	3.443
	CaCO <sub>3</sub>	0.1000	0.040
5	H <sub>3</sub> BO <sub>3</sub>	0.20 wt%	0.009
	Eu <sub>2</sub> O <sub>3</sub>	0.0400	0.056
	BaCO <sub>3</sub>	1.003	0.794

The procedure for applying an aluminum oxyhydroxide coating in order to form the  
 10 cCBAL and cBAM phosphors involves suspending the powders in a fluidized bed  
 reactor in which vaporized trimethylaluminum (TMA) and water vapor are reacted at  
 about 430°C to form an aluminum oxyhydroxide coating. A nitrogen gas stream is  
 introduced into the base of the reactor through a metal frit distributor plate in order to  
 fluidize the bed of phosphor particles. The reactor is then heated to about 430°C by an  
 15 external furnace. Vaporized TMA from a heated TMA bubbler (34°C) and water vapor  
 from a heated water bubbler (70°C) are entrained in separate nitrogen gas streams. The  
 TMA/nitrogen stream is combined with the nitrogen fluidizing gas and passed into the  
 reactor through the distributor plate. After saturating the phosphor particles with TMA  
 vapor for about one minute, the water vapor/nitrogen stream is introduced into the  
 20 reactor through a central distributor. The central distributor is preferably a perforated  
 hollow shaft which has been inserted into the reactor through the top and may be part of  
 a vibrating mixer used to keep the particles fluidized. The TMA and water react to  
 form an aluminum oxyhydroxide coating on the phosphor particles. The thickness of  
 the coating on the individual particles may be adjusted by manipulating the time spent  
 25 in the reactor, the concentrations of the reactants in the gas streams, and the flow rates  
 of the reactant gas streams.

Blends of CBAL-BAM and cCBAL-BAM phosphors were prepared by adding amounts  
 of the two components to a clean glass container and then thoroughly mixing them by a  
 30 roll-blending technique. Such mixtures can easily be modified to give the desired  
 properties by adjusting the weight ratios of the two components.

Blends of CBAL - LaPOT and cCBAL - LaPOT were prepared by quantities of the two components to glass containers along with a small amount of media and de-ionized water and thoroughly mixing the material by roll-blending for 20 minutes. The media were removed and the samples were dried before testing. As stated before, such mixtures can easily be modified to give the desired properties by adjusting the weight ratios of the two components. Preferably, the ratios of the CBAL:LaPOT components will range from 2:1 to 20:1 by weight.

## 10 Test Results

Samples of CBAL, cCBAL, cBAM, CBAL-BAM mixtures, CBAL-cBAM mixtures, CBAL-LaPOT mixtures, and cCBAL-LaPOT mixtures were measured along with a sample of commercially available BAM phosphor (used as the control) for initial intensity relative to a standard. The VUV emission spectra were collected using the Perkin-Elmer LS-50B spectrometer previously described. The samples were then degraded through the thermal-humidity treatment previously described and the VUV intensities were re-measured. All samples were degraded under experimentally equivalent conditions. The same samples were further degraded through exposure to a high intensity Xe plasma and VUV photon flux using the apparatus previously described and their VUV intensities re-measured.

Table 1 provides the results of the powder plaque optical emission measurements for the initial and degraded VUV-excited phosphors. The term "TH" refers to samples degraded by exposure to elevated temperature and humidity. The term "THX" denotes samples which have been further degraded after the TH testing by exposure to the high intensity Xe plasma and VUV photon flux. Intensity is measured relative to a standard BAM phosphor. The blend ratios in parentheses are given in terms of phosphor weight.

Table 1

Powder Plaque Data							
	BAM control	CBAL	cBAM	CBAL - BAM (1:1)	CBAL - cBAM (1:1)	CBAL - LaPOT (5:1)	CBAL - LaPOT (11:1)
Intensity (initial)	96%	80%	82%	87%	81%	75%	77%
Peak $\lambda$ (initial)	447 nm	440 nm	448 nm	444 nm	444 nm	440 nm	440 nm
y value (initial)	0.0466	0.0552	0.0476	0.0505	0.0508	0.0588	0.0582
Intensity (TH)	88%	76%	79%	81%	76%	72%	74%
Peak $\lambda$ (TH)	458 nm	440 nm	456 nm	449 nm	448 nm	440 nm	440 nm
(TH) y value	0.0852	0.0564	0.0806	0.0719	0.0701	0.0581	0.0575
%(I/y) (TH)	50%	93%	57%	65%	68%	96%	98%
Intensity (THX)	52%	48%	57%	49%	49%	46%	48%
Peak $\lambda$ (THX)	456 nm	440 nm	455 nm	447 nm	448 nm	440 nm	440 nm
y value (THX)	0.0931	0.0632	0.0912	0.0759	0.0785	0.0675	0.0668
%(I/y) (THX)	27%	53%	36%	37%	40%	54%	55%

- 5 Although the BAM control sample exhibits the greatest initial intensity, it also exhibits the worst degradation as measured by the %(I/y) ratio. The I/y ratio after thermal-humidity testing is only 50% of the initial I/y ratio for the BAM control and 27% of the initial I/y ratio after thermal-humidity and high intensity Xe plasma – VUV photon flux testing. Its final intensity (THX) is at most 6% higher than the least intense sample.
- 10 while initially the BAM control was as much as 16% higher than the least intense sample.

All of the experimental samples exhibit significantly better maintenance than does the BAM control. In particular, the CBAL and CBAL-LaPOT mixtures exhibit superior maintenance of the I/y ratio after degradation testing. The TH samples are more than 80% better than BAM, maintaining at least 93% of the initial I/y ratio after thermal humidity testing (vs. 50% for the control) and the THX samples are nearly 100% better than BAM, maintaining at least 53% of the initial I/y ratio after thermal-humidity and high intensity Xe plasma – VUV photon flux testing (vs. 27% for the control). In addition, all CBAL-containing samples have a bluer peak wavelength both before and after TH and THX treatments compared to the BAM control. The CBAL-BAM and CBAL-cBAM mixtures show improved degradation maintenance over BAM and cBAM alone, respectively.

Table 2 provides the results of powder plaque and paste slide optical emission results from initial and degraded VUV-excited phosphors. As in Table 1, intensity is measured relative to a standard BAM phosphor and the blend ratios in parentheses are given in terms of phosphor weight. The term "X" denotes samples which have been degraded only by exposure to the high intensity Xe plasma and VUV photon flux. In an effort to obtain data which more closely approximated PDP panel manufacturing, paste slide data was obtained by mixing the phosphor samples with a paste designed for PDP panels, e.g., the paste described in U.S. Patent No. 6,660,184.

Table 2

	Powder Plaque Data			Paste Slide Data				
	BAM (control)	CBAL	cCBAL	BAM (control)	CBAL	cCBAL	CBAL- LaPOT (9:1)	cCBAL- LaPOT (9:1)
Intensity (initial)	96%	76%	68%	104%	84%	79%	84%	77%
Peak $\lambda$ (initial)	446 nm	439 nm	439 nm	446 nm	439 nm	439 nm	439 nm	439 nm
Initial y value	0.0465	0.0568	0.0553	0.0466	0.0518	0.0517	0.0518	0.0523
Intensity (TH)	87%	74%	69%	96%	82%	79%	79%	77%
Peak $\lambda$ (TH)	456 nm	439 nm	439 nm	456 nm	439 nm	439 nm	439 nm	439 nm
(TH) y value	0.0803	0.0571	0.0566	0.0771	0.0527	0.0542	0.0535	0.0546
%(I/y) (TH)	52%	96%	98%	56%	96%	95%	91%	96%
Intensity (X)	57%	42%	49%	76%	61%	66%	67%	69%
Peak $\lambda$ (X)	446 nm	439 nm	439 nm	446 nm	439 nm	439 nm	439 nm	439 nm
(X) y value	0.0527	0.0625	0.0608	0.0504	0.0565	0.0563	0.0573	0.0568
%(I/y) (X)	53%	50%	65%	68%	66%	76%	72%	82%
Intensity (THX)	52%	47%	49%	64%	60%	65%	63%	63%
Peak $\lambda$ (THX)	454 nm	439 nm	439 nm	454 nm	439 nm	439 nm	439 nm	439 nm
(THX) y value	0.0901	0.0642	0.0633	0.0905	0.0596	0.0602	0.0602	0.0606
%(I/y) (THX)	28%	54%	63%	32%	62%	70%	65%	70%

The degradation results from powder and paste preparations of the same samples are basically equivalent. Although the paste brightness results tend to be higher than the powder brightness values, they are relatively the same. The peak wavelength at

maximum intensity does not change for either the CBAL or cCBAL :

BAM control sample shows a large shift in color after the thermal h

initial brightness for the BAM control is much higher than the initial brightness of the CBAL, cCBAL, CBAL-LaPOT, and cCBAL-LaPOT samples, while after exposure to

5 the thermal humidity test and the high intensity Xe plasma and VUV photon flux, all samples have comparable brightness. The maintenance of in terms of  $\%(I/y)$  for the CBAL sample after (THX) thermal humidity and Xe plasma testing is vastly superior to that of the BAM control (54% vs. 28% and 62% vs 32%, respectively) and the maintenance of the aluminum oxyhydroxide-coated CBAL (cCBAL) is further superior  
10 to that of uncoated CBAL. The cCBAL material also exhibits significantly improved maintenance after high intensity Xe plasma and VUV photon flux exposure without any thermal humidity tests being involved. The CBAL-LaPOT and cCBAL-LaPOT blends behave similarly to the CBAL and cCBAL components, but show higher maintenance values.

15

While there has been shown and described what are at the present considered the preferred embodiments of the invention, it will be obvious to those skilled in the art that various changes and modifications may be made therein without departing from the scope of the invention as defined by the appended claims.

20

Claims

We claim :

- 5 1. A VUV-excited device including a discharge chamber with a phosphor coating, the discharge chamber containing a rare gas or rare gas mixture, the phosphor coating being applied to an inner surface of the discharge chamber, the device when operated generating a discharge which emits vacuum ultraviolet radiation as a primary source of excitation, the phosphor coating containing a europium-activated, calcium-substituted  
10 barium hexa-aluminate phosphor.
2. The VUV-excited device of claim 1 wherein the europium-activated, calcium-substituted barium hexa-aluminate phosphor has a composition which is represented by  $Ba_{1.29-x-y}Ca_xEu_yAl_{12}O_{19.29}$ , wherein  $0 < x < 0.25$  and  $0.01 < y < 0.20$ .  
15
3. The VUV-excited device of claim 1 wherein the device generates a vacuum ultraviolet light having a wavelength of 147 nm to 173 nm.
4. The VUV-excited device of claim 1 wherein the discharge chamber contains  
20 xenon or a mixture of xenon and helium.
5. The VUV-excited device of claim 1 wherein the phosphor coating additionally contains a phosphor selected from the group consisting of europium-activated barium magnesium aluminate, europium-activated barium magnesium aluminate coated with  
25 aluminum oxyhydroxide, and  $(Gd,La)PO_4:Tm,Li$ .
6. The VUV-excited device of claim 1 wherein the phosphor coating additionally contains a  $(Gd,La)PO_4:Tm,Li$  phosphor and a ratio of the europium-activated, calcium-substituted barium hexa-aluminate phosphor to the  $(Gd,La)PO_4:Tm,Li$  is in the range  
30 from 2:1 to 20:1 by weight.

7. The VUV-excited device of claim 1 wherein the europium-activated substituted barium hexa-aluminate phosphor is coated with aluminum

8. A VUV-excited device including a discharge chamber with a phosphor coating,  
5 the discharge chamber containing a rare gas or rare gas mixture, the phosphor coating being applied to an inner surface of the discharge chamber, the device when operated generating a discharge which emits vacuum ultraviolet radiation as a primary source of excitation, the phosphor coating containing a europium-activated, calcium-substituted barium hexa-aluminate phosphor having a composition which is represented by  
10  $Ba_{1.29-x-y}Ca_xEu_yAl_{12}O_{19.29}$ , wherein  $0 < x < 0.25$  and  $0.01 < y < 0.20$ .

9. The VUV-excited device of claim 8 wherein the device generates a vacuum ultraviolet light having a wavelength of 147 nm to 173 nm.

10. The VUV-excited device of claim 8 wherein the discharge chamber contains xenon or a mixture of xenon and helium.

11. The VUV-excited device of claim 8 wherein the phosphor coating additionally contains a phosphor selected from the group consisting of europium-activated barium magnesium aluminate, europium-activated barium magnesium aluminate coated with  
20 aluminum oxyhydroxide, and  $(Gd,Lu)PO_4:Tm,Li$ .

12. The VUV-excited device of claim 8 wherein the phosphor coating additionally contains a  $(Gd,Lu)PO_4:Tm,Li$  phosphor and a ratio of the europium-activated, calcium-substituted barium hexa-aluminate phosphor to the  $(Gd,Lu)PO_4:Tm,Li$  is in the range  
25 from 2:1 to 20:1 by weight.

13. The VUV-excited device of claim 8 wherein the europium-activated, calcium-substituted barium hexa-aluminate phosphor is coated with aluminum oxyhydroxide.

30



14. A method of generating blue light comprising exciting a blue-e  
with vacuum ultraviolet radiation, the blue-emitting phosphor compris  
activated, calcium-substituted barium hexa-aluminate phosphor.

5 15. The method of claim 14 wherein the europium-activated, calcium-substituted  
barium hexa-aluminate phosphor has a composition which is represented by  
 $Ba_{1.29-x-y}Ca_xEu_yAl_{12}O_{19.29}$ , wherein  $0 < x < 0.25$  and  $0.01 < y < 0.20$ .


16. The method of claim 14 wherein the device generates a vacuum ultraviolet light  
10 having a wavelength of 147 nm to 173 nm.

17. The method of claim 15 wherein the device generates a vacuum ultraviolet light  
having a wavelength of 147 nm to 173 nm.

15 18. The method of claim 14 wherein the phosphor coating additionally contains a  
phosphor selected from the group consisting of europium-activated barium magnesium  
aluminate, europium-activated barium magnesium aluminate coated with aluminum  
oxyhydroxide, and  $(Gd,La)PO_4:Tm,Li$ .

20 19. The method of claim 14 wherein the phosphor coating additionally contains a  
 $(Gd,La)PO_4:Tm,Li$  phosphor and a ratio of the europium-activated, calcium-substituted  
barium hexa-aluminate phosphor to the  $(Gd,La)PO_4:Tm,Li$  is in the range from 2:1 to  
20:1 by weight.

25 20. The method of claim 14 wherein the europium-activated, calcium-substituted  
barium hexa-aluminate phosphor is coated with aluminum oxyhydroxide.

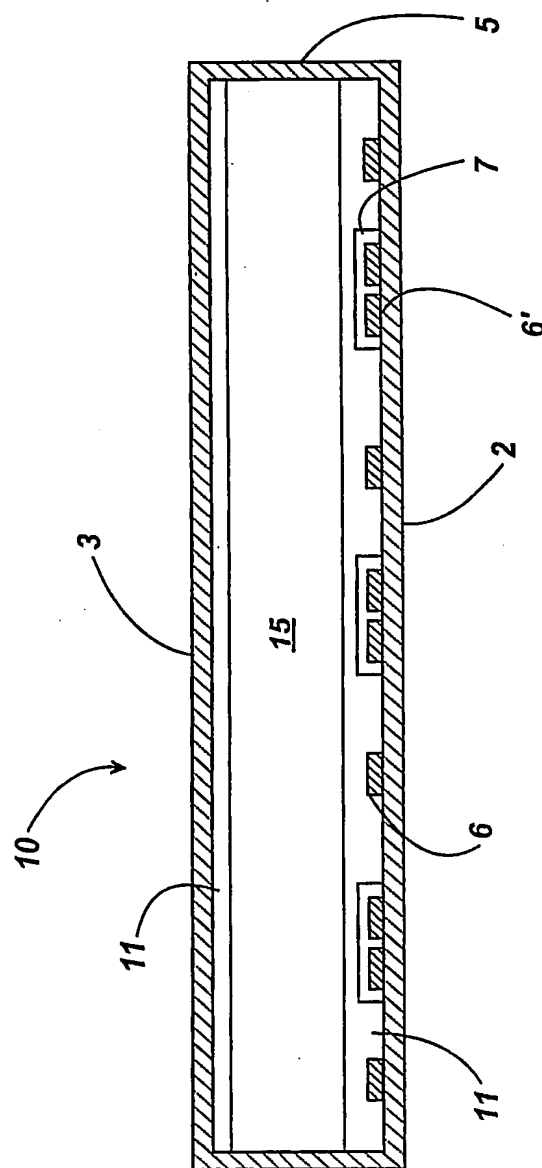

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US04/15079

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H01J 1/62, 63/04; C09K 11/64

US CL : 313/486; 252/301.4r

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 313/486,487,489; 252/301.4r

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3,670,194 A (Thornton et al) 13 June 1972 (13.06.1972).	1-20
A	US 4,733,126 A (Yamakawa et al) 22 March 1988 (22.03.88).	1-20
A	US 4,827,187 A (Verlijdsdonk) 2 May 1989 (02.05.1989).	1-20
A	US 5,471,113 (De Backer et al) 28, November 1995 (28.11.1995).	1-20
A	US 2002/0025901 A1 (Ono et al) 28 February 2002 (28.02.2002).	1-20

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

Special categories of cited documents:	
*A* document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*E* earlier application or patent published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*O* document referring to an oral disclosure, use, exhibition or other means	*Z* document member of the same patent family
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

01 February 2005 (01.02.2005)

Date of mailing of the international search report

31 MAR 2005

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Peter J Macchiarolo

Telephone No. (571) 272-1500

JOSEPH WILLIAMS  
PRIMARY EXAMINER

*Joseph Williams*